## 400S/460SJ MID-SIZE TELESCOPIC BOOM LIFTS



- Mid-size diesel telescopic boom lifts
- Available with and without a jib boom
- 4-wheel drive for excellent rough terrain performance
- Dual envelope for maximum lift capacities
- Ideal for construction and industrial applications



### **MID-SIZE TELESCOPIC BOOM LIFTS**

DIMENSIONS	400S	460SJ
Max. working height	14.2m	16.0m
Max. platform height ( <b>A</b> )	12.2m	14.0m
Max. working outreach	10.6m	12.3m
Platform size	2.44m x 0.91m	2.44m x 0.91m
Overall width ( <b>B</b> )	2.31m	2.31m
Transport width	2.08m	2.08m
Overall length ( <b>C</b> )	7.57m	8.6m
Transport length	7.57m	6.81m
Stowed height ( <b>D</b> )	2.38m	2.38m
Transport height	2.38m	2.92m
Ground clearance	320mm	320mm

PERFORMANCE
-------------


Platform capacity (SWL) unrestricted	272kg	272kg
Platform capacity (SWL) restricted	454kg	454kg
Max. drive height	12.2m	14.0m
Max. wind speed	12.5m/s	12.5m/s
Max. drive speed (stowed)	6.8km/h	6.8km/h
Max. drive speed (elevated)	1.0km/h	1.0km/h
Jib length	n/a	1.67m
Jib arc	n/a	135° (+70°/-65°)
Platform rotation	150°	150°
Turret rotation (continuous)	360°	360°
Tailswing	0.9m	0.9m
Raise/lower time	64/64 sec	64/64 sec
Gradeability	50%	50%
Inside turning radius	3.0m	3.0m
Outside turning radius	5.06m	5.06m
Tyres	355/55 D625 foam filled lug	
Controls	Proportional drive, raise, slew, extend, jib & platform rotate	
Drive system	4-wheel drive	
POWER		

Ρ	0	V	V	F	R


Power source	Kubota 18.6kW (24.9	Kubota 18.6kW (24.9hp) diesel - Stage V12V DC12V DC	
Auxillary power unit	12V DC		
WEIGHT			
Weight	7,135kg	7,829kg	

Weight

### WORKING ENVELOPES

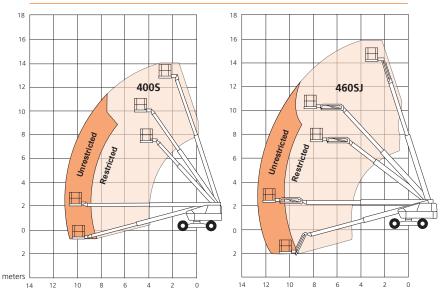

# 400S/460SJ

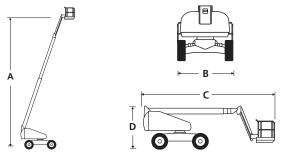

### **STANDARD FEATURES**

- Snorkel Guard<sup>™</sup> secondary guarding system
- 1.67m 135° jib (460SJ)
- Oscillating axle
- Hydraulic platform rotation
- 4-wheel drive
- All proportional controls
- Swing-out engine tray
- Hydraulic oil cooler
- Hour meter & on-board diagnostics display
- Power line to platform
- Tilt alarm & cut-out
- DC emergency operation •
- Tri-entry platform
- Flashing amber light •
- 2 year parts & labour, 5 year structural warranty •
- CE approved

### **OPTIONS**

- Special paint colours •
- Airline to platform
- Air-filled flotation tyres
- Pipe rack
- Non-marking tyres
- Dual fuel
- AC generator 110V/240V 2kW
- Aircraft package •
- Deluxe aircraft package •
- Cold weather package
- Extreme cold weather package
- Extreme environment package
- Light package •
- Tow kit
- Glazier package •
- 7.5kW generator package
- Environmental hydraulic oil
- Tool tray
- Snorkel OnSite<sup>™</sup> telematics



Vigo Centre, Birtley Road, Washington, Tyne & Wear, NE38 9DA, U.K.

t: +44 (0) 845 1550 057 e: sales.emea@snorkellifts.com

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance.

CF Specification © Snorkel 2021