
# **S9031RT-HC/S9043RT-HC** ULTRA-HIGH CAPACITY ROUGH TERRAIN SCISSOR LIFTS



- Ultra-high capacity, large deck rough terrain scissor lifts
- Excellent rough terrain performance
- Heavy duty design
- Dual powered extension decks
- Ideal for construction applications

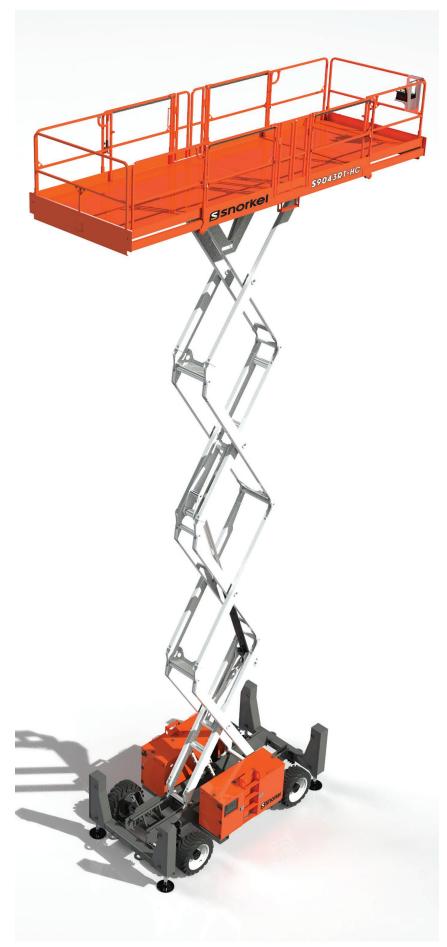

### **ULTRA-HIGH CAPACITY ROUGH TERRAIN SCISSOR LIFTS**

| DIMENSIONS                          | S9031RT-HC*   | S9043RT-HC* |
|-------------------------------------|---------------|-------------|
| Max. working height                 | 11.4m         | 15.1m       |
| Max. platform height ( <b>A</b> )   | 9.4m          | 13.1m       |
| Platform size (stowed)              | 2.28m x 4.87m |             |
| Platform size (dual decks extended) | 2.28m x 8.23m |             |
| Extension deck length               | 1.37m         | 1.37m       |
| Overall width ( <b>B</b> )          | 2.28m         | 2.28m       |
| Overall length ( <b>D</b> )         | 4.87m         | 4.87m       |
| Stowed height ( <b>C</b> )          | 2.77m         | 2.77m       |
| Min. height (guardrails folded)     | 1.9m          | 1.9m        |
| Ground clearance                    | 356mm         | 356mm       |

| PERFORMANCE                              |                       |           |
|--|-----------------------|-----------|
| Platform capacity (SWL)                  | 1,814kg               | 1,587kg   |
| Max. drive height                        | 9.4m                  | 13.1m     |
| Max. wind speed                          | 12.5m/s               | 12.5m/s   |
| Max. drive speed (stowed)                | 6.7km/h               | 6.7km/h   |
| Max. drive speed (elevated)              | 0.96km/h              | 0.96km/h  |
| Raise/lower time                         | 30/20 sec             | 40/25 sec |
| Gradeability                             | 50%                   | 50%       |
| Max. stabilizer levelling, front to rear | 6°                    | 6°        |
| Max. stabilizer levelling, side to side  | 12°                   | 12°       |
| Inside turning radius                    | 2.4m                  | 2.4m      |
| Outside turning radius                   | 5.6m                  | 5.6m      |
| Tyres                                    | 13 x 36 foam filled   |           |
| Controls                                 | proportional joystick |           |
| Drive system                             | 4-wheel drive         |           |


#### POWER

Power source

| WEIGHT |         |         |
|--------|---------|---------|
| Weight | 6,803kg | 7,711kg |

Kubota diesel engine


#### TURNING RADIUS



CE Specification © Snorkel 2021

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance. \*Preliminary specifications – confirm at time of ordering.

## **S9031RT-HC/ S9043RT-HC**



### **STANDARD FEATURES**

- 4-wheel drive
- 4 hydraulic stabilizers with automatic levelling •
- Dual powered extension decks
- Proportional controls •
- Foam filled tyres •
- Power line to platform •
- Drive motion alarm
- Descent alarm
- Fold-down guardrails
- Locking oscillating axle
- Manual lowering valve
- Flashing amber light
- Dual lanyard attachment points
- Hour meter & on-board diagnostics display
- 2 year parts & labour, 5 year structural warranty
- CE approved

#### **OPTIONS**

- Special paint colours •
- Nylon spreader pads (set of 4)
- Environmental hydraulic oil
- Cold weather package (block heater + battery warm up)
- Hydraulic generator 110V/240V
- 12kW generator package
- Snorkel OnSite<sup>™</sup> telematics

### vww.snorkel

Vigo Centre, Birtley Road, Washington, Tyne & Wear, NE38 9DA, U.K.

t: +44 (0) 845 1550 057 e: sales.emea@snorkellifts.com lifts.com